
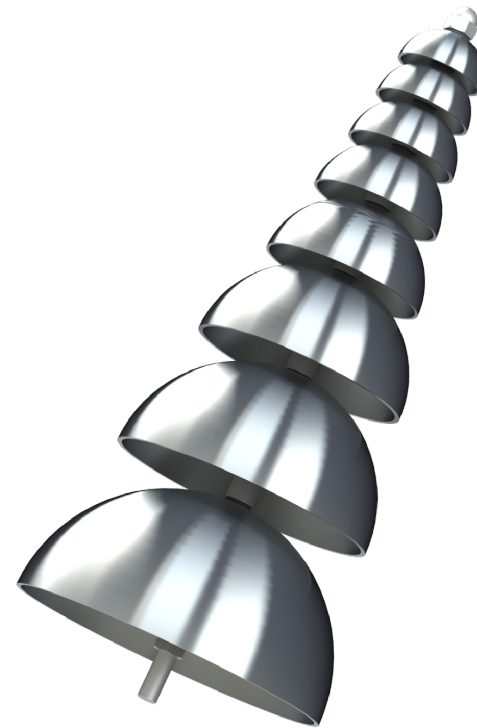


# Pagoda Bells

## Features:

- Stainless Steel Bells
- Stainless Steel Hardware

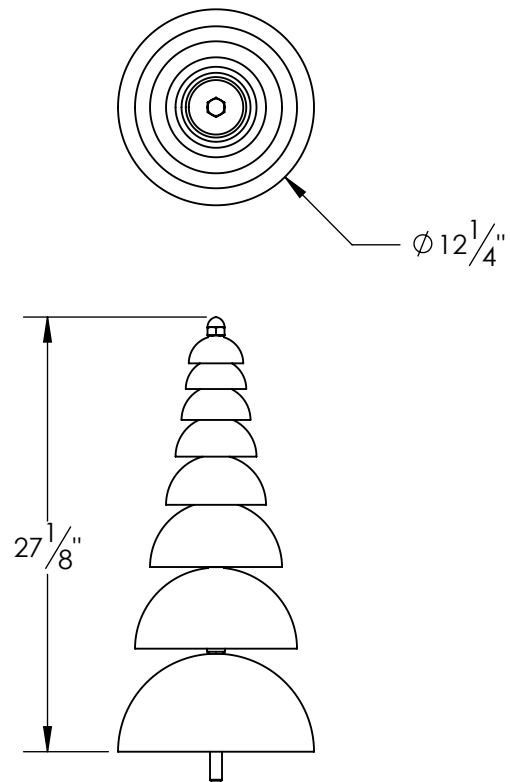

**MOUNTING OPTION IDENTIFICATION:**

This instrument is offered with various mounting options. Identify your option below and follow installation instructions on the following sheets.

**Recycled Post In-Ground  
Sheet 4 of 5**



- Parts List:**
- ☐ Instrument Assembly (1)
  - ☐ Recycled Post In-Ground (1)
  - ☐ 1/4"-20 x 1/2" Lg.  
Tamper-Resistant Set Screw (1)
  - ☐ #12 Button Head Screw, 2.5" Lg.  
Tamper-Resistant (4)
  - ☐ Security Driver (2)

**Weights:**  
Boxed Instrument Weight, 27 lbs.  
Boxed Post Weight, 31 lbs.

**Steel Post In-Ground  
Sheet 4 of 5**



- Parts List:**
- ☐ Instrument Assembly (1)
  - ☐ Steel Post In-Ground (1)
  - ☐ 1/4"-20 x 1/2" Lg.  
Tamper-Resistant Set Screw (1)
  - ☐ #12 Button Head Screw, 2.5" Lg.  
Tamper-Resistant (4)
  - ☐ Security Driver (2)

**Weights:**  
Boxed Instrument Weight, 27 lbs.  
Boxed Post Weight, 38 lbs.


**Recycled Post Surface Mount  
Sheet 5 of 5**



- Parts List:**
- ☐ Instrument Assembly (1)
  - ☐ Recycled Post Surface Mount (1)
  - ☐ Ø 3/8" x 5" Anchor Bolt (4)
  - ☐ Plastic Anchor Cap (4)
  - ☐ 1/4"-20 x 1/2" Lg.  
Tamper-Resistant Set Screw (1)
  - ☐ #12 Button Head Screw, 2.5" Lg.  
Tamper-Resistant (4)
  - ☐ Security Driver (2)

**Weights:**  
Boxed Instrument Weight, 27 lbs.  
Boxed Post Weight, 28 lbs.

**Steel Post Surface Mount  
Sheet 5 of 5**

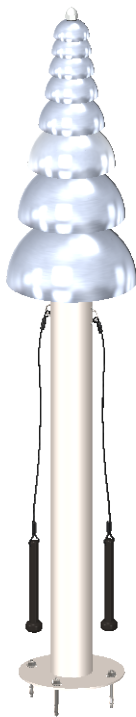

- Parts List:**
- ☐ Instrument Assembly (1)
  - ☐ Steel Post Surface Mount (1)
  - ☐ Ø 3/8" x 3 3/4" Anchor Bolt (4)
  - ☐ Plastic Anchor Cap (4)
  - ☐ 1/4"-20 x 1/2" Lg.  
Tamper-Resistant Set Screw (1)
  - ☐ #12 Button Head Screw, 2.5" Lg.  
Tamper-Resistant (4)
  - ☐ Security Driver (2)


**Weights:**  
Boxed Instrument Weight, 27 lbs.  
Boxed Post Weight, 34 lbs.

## INSTRUMENT TO POST INSTALLATION PROCEDURES (Recycled Post Only)

**Step 1:** Fasten the Threaded Rod Support to the Post with the provided (4) 2.5" lg. Tamper-Resistant Screws and Driver. Make sure that the Threaded Rod Support is centered with the post.

**Step 2:** Thread the Instrument Assembly's threaded rod into the Threaded Rod Support on the Instrument Post. Tighten until the Stop Nut makes contact with the Threaded Rod Support.

**Step 3:** Take the 1/2" long Tamper-Resistant Set Screw and thread it through the Threaded Rod Support all the way into the Threaded Rod. This secures the Instrument Assembly so that it can not be backed out.

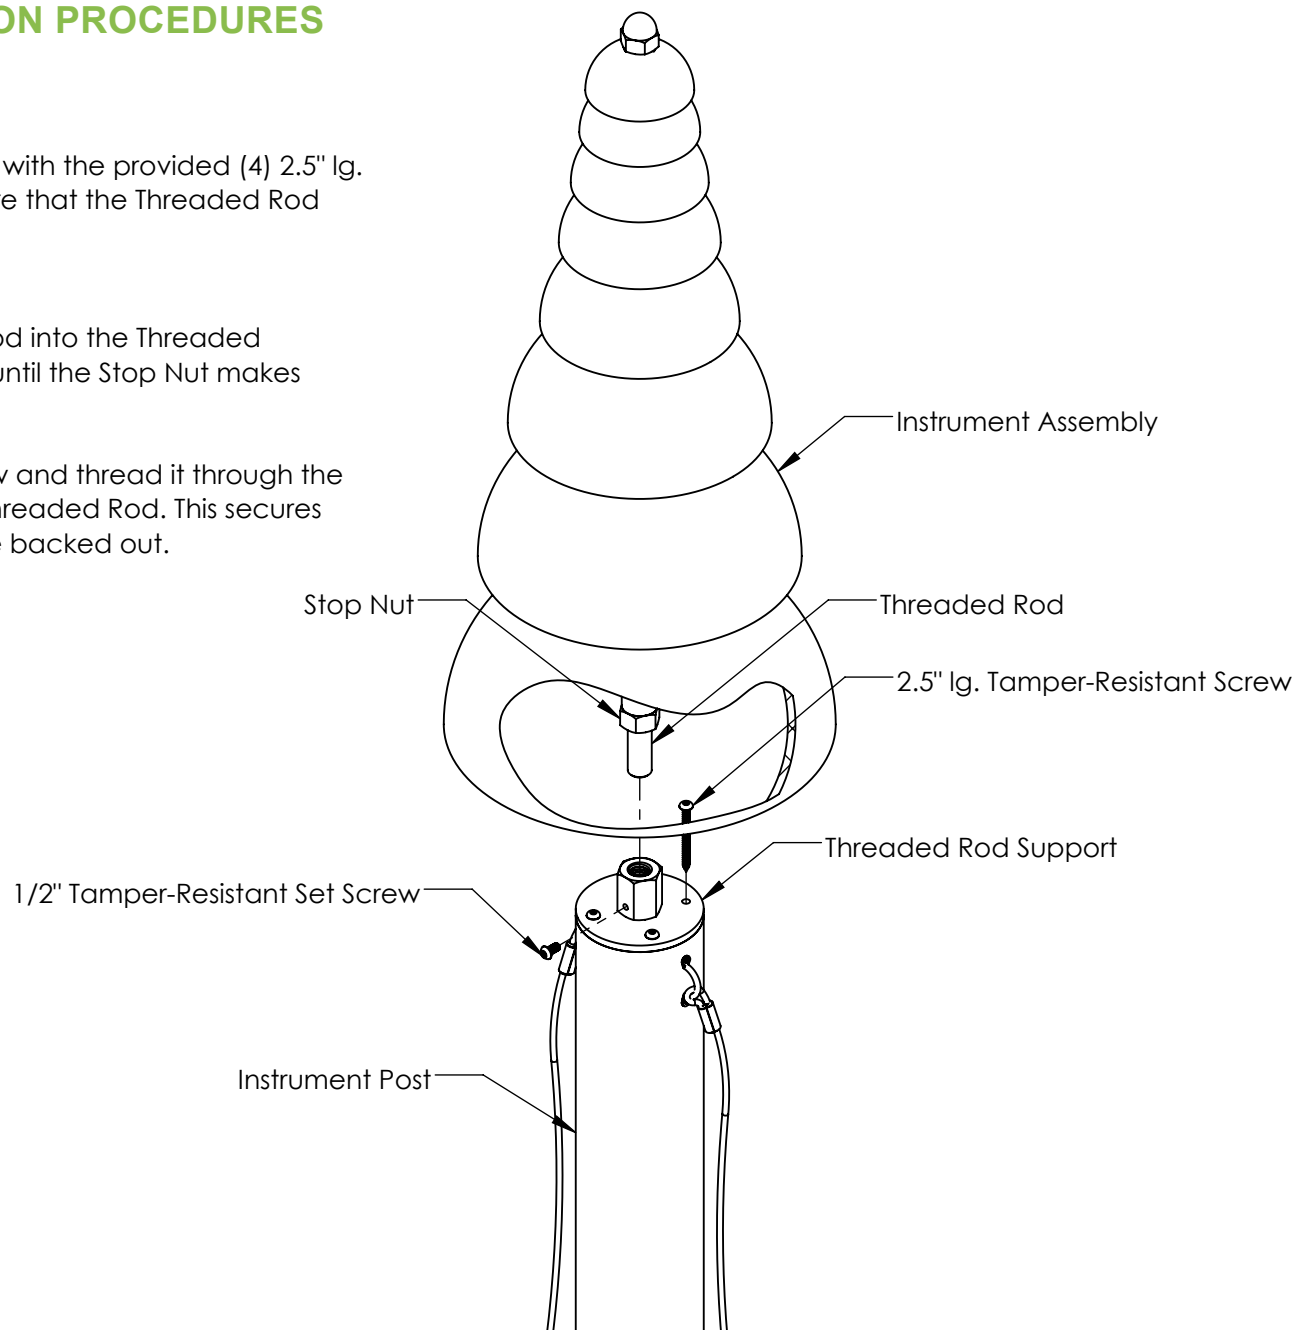

## RECYCLED AND STEEL POST IN-GROUND INSTALLATION PROCEDURES

**Step 1:** Excavate one 10" diameter hole, 36" deep at the installation location. Contractor can modify post to desired height.


**Post Length = Frost Depth (36" Recommended) + Finished Height**

**Finished Height Guideline:** (Ages 3-5, 23") (Ages 5-7, 28") (Ages 7-11, 33") (Adult, 37")

**Step 2:** Lower the post into the excavated hole.

**Step 3:** Verify the correct placement, levelness, plumbness, and finished height of the instrument. Also check for sufficient clearance around the instrument. A 36" radius is recommended around the instrument for wheelchair accessibility, however this is not required for instrument function. Instrument may be installed next to a wall or in a variety of different configurations.

**Step 4:** Last pour concrete around the post. It is recommended to brace the instrument to hold it rigid while the concrete cures. Leave to set according to the concrete manufacturers guidelines. Approximately (2) 80lb. bags will be needed.

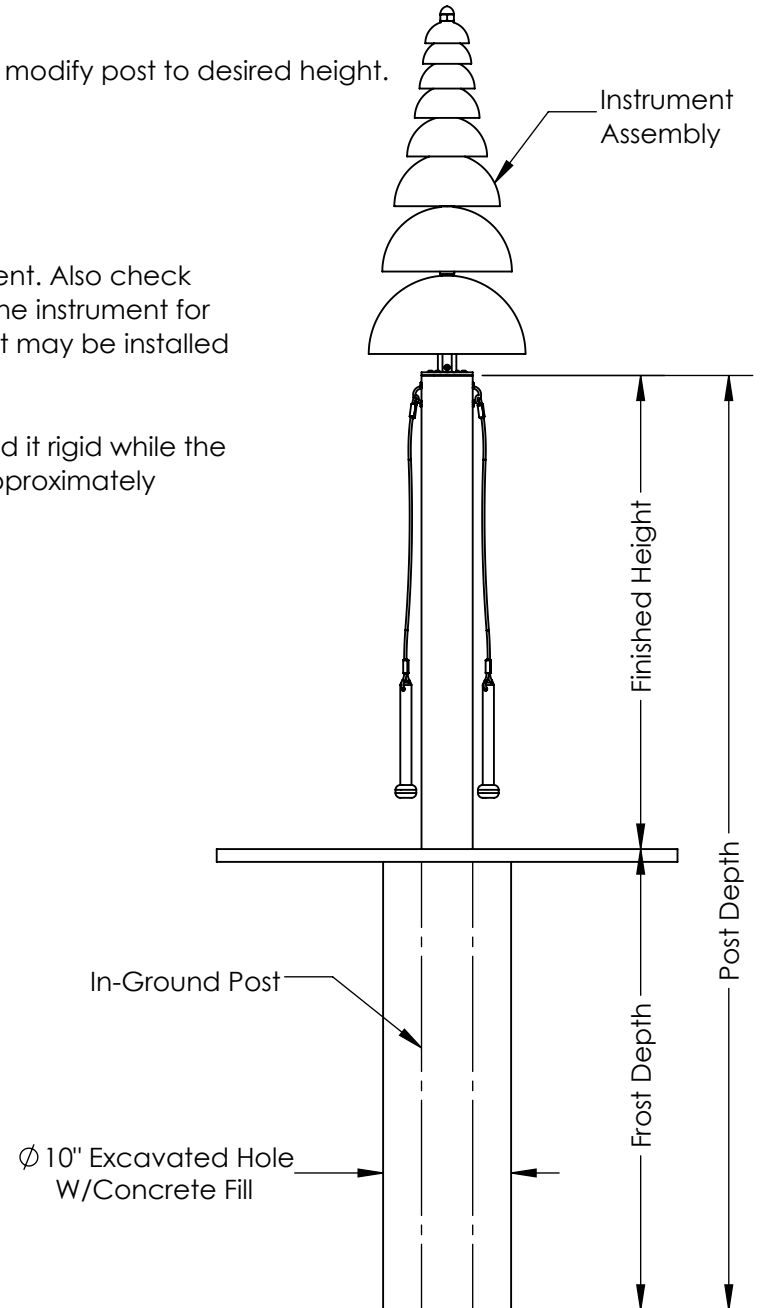

# RECYCLED AND STEEL POST SURFACE MOUNT INSTALLATION PROCEDURES

**Step 1:** Standard height for Surface Mount Posts is 37". Post may be modified in the field to the following heights:  
(Ages 3-5, 23") (Ages 5-7, 28") (Ages 7-11, 33") (Adult, 37")

**Step 2:** Determine installation location. Verify concrete footing is a minimum of 6" thick. If the concrete pad is at an angle, steel washers are required to act as shims. (Shims not provided)

**Step 3:** Stand the surface mount post upright onto the concrete pad. Mark the center of the holes on the surface mount plate. After you have made your marks, set aside the post in order to drill for anchor holes. With a hammer or rotary drill, drill through concrete at marked locations. Drill to a minimum depth of 4". A 3/8" masonry drill bit will be needed.

**Step 4:** Place the surface mounted post back over the drilled out holes. Insert provided anchor bolts into aligned holes. Position anchor nut so that it is flush with the top of the bolt. Pound anchor bolts into the hole until the anchor washer is flush with the post base. Tighten anchor bolts until they are snug. Cover remaining bolt sections with provided plastic caps.

**Step 5:** Verify the correct placement, levelness, plumbness, and finished height of the instrument. Also check for sufficient clearance around the instrument. A 36" radius is recommended around the instrument for wheelchair accessibility, however this is not required for instrument function. Instrument may be installed next to a wall or in a variety of different configurations.

