







# Tai-Chi Spinners


SKU: N0Jft240

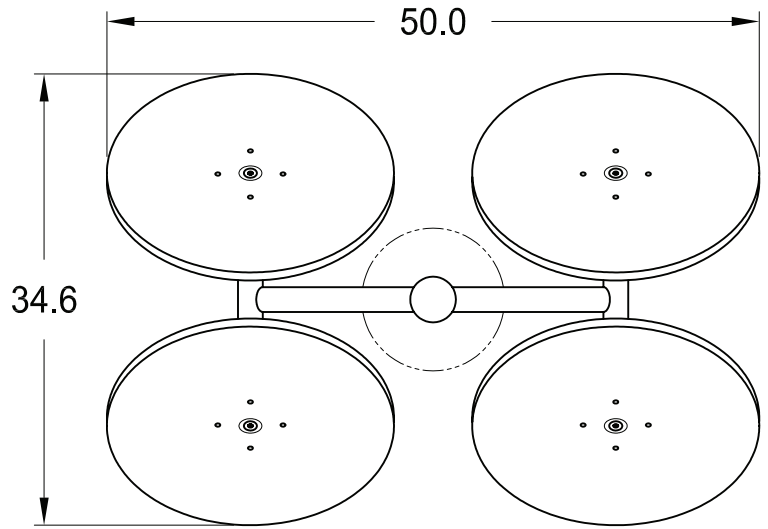

Hardware Location:  
 3/8-16 x 1.25" B.H. Bolt w/Locktite, Qty: 16  
 3/8-16 Nyloc Nut, Qty: 16  
 3/8-16 Flat Washer, Qty: 32




Hardware Location:  
 Fender Washer, 1.25 O.D., .41 I.D. x .09 Thk, Qty: 4  
 3/8-16 x 3/4" B.H. Security Bolt, w/Locktite, Qty: 4

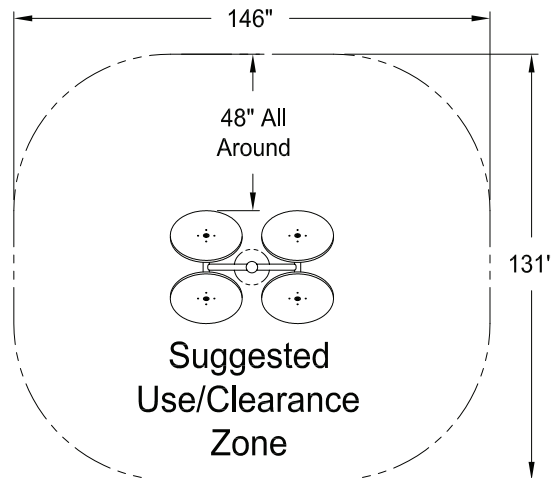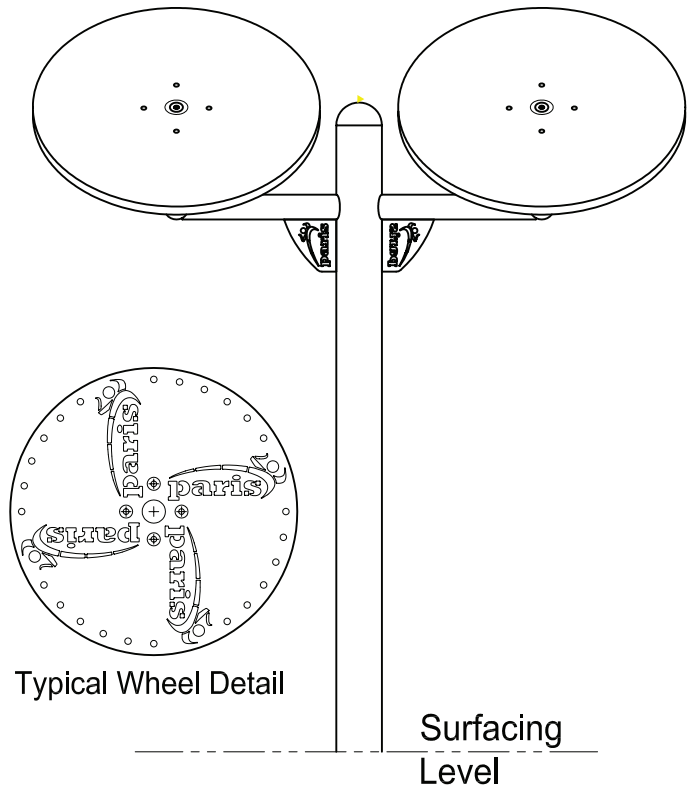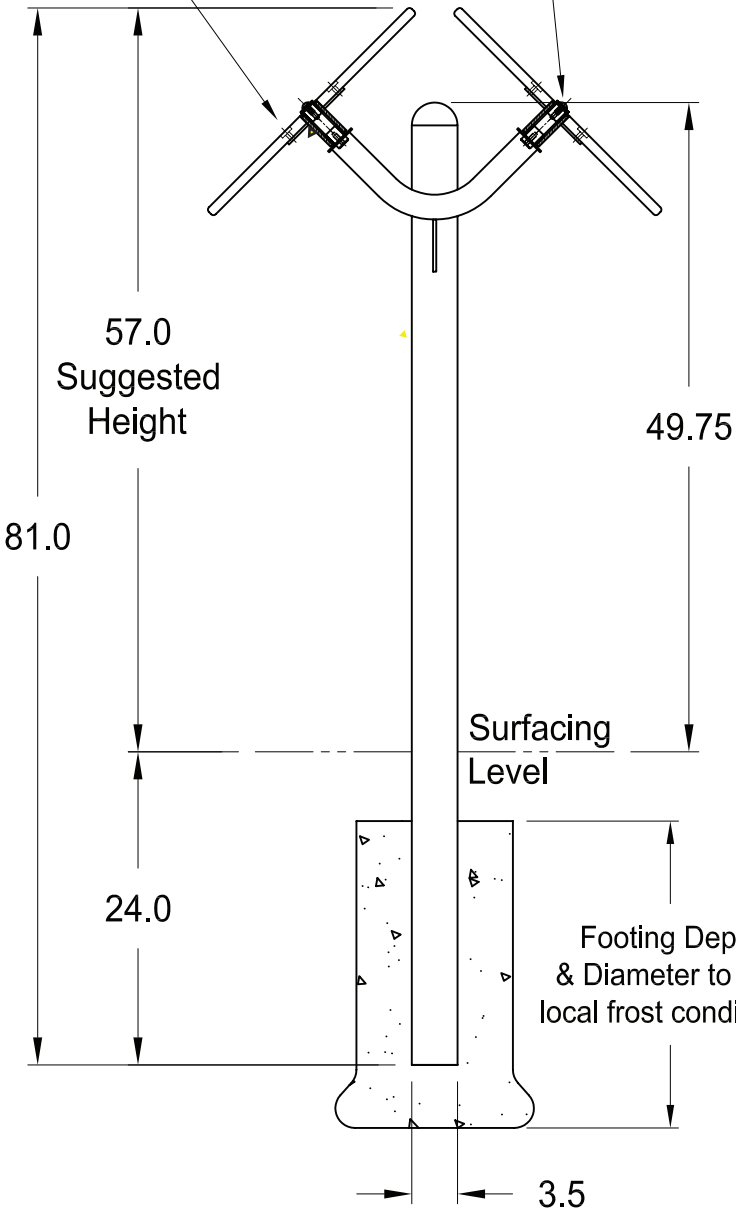

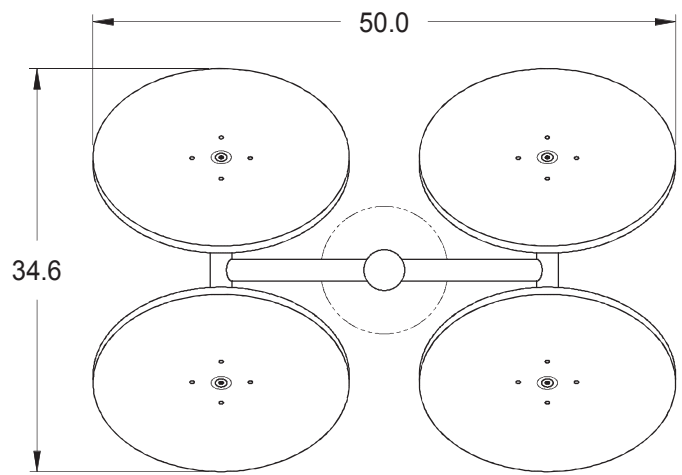

Hardware Location:  
 3/8-16 x 1.25" B.H. Bolt w/Locktite, Qty: 16  
 3/8-16 Nyloc Nut, Qty: 16  
 3/8-16 Flat Washer, Qty: 32

Hardware Location:  
 Fender Washer, 1.25 O.D., .41 I.D. x .09 Thk, Qty: 4  
 3/8-16 x 3/4" B.H. Security Bolt, w/Locktite, Qty: 4

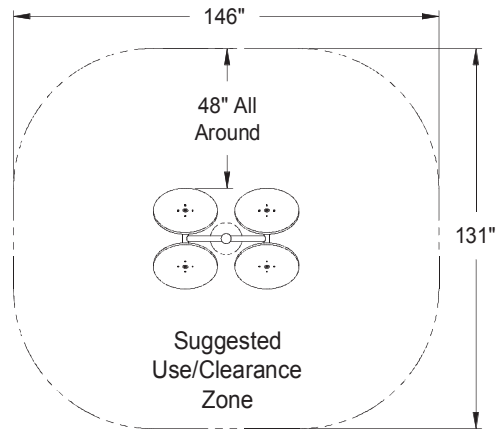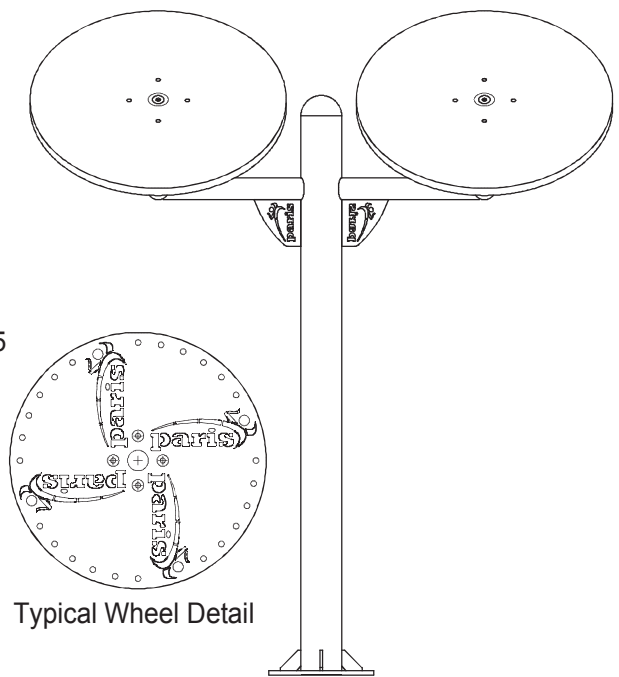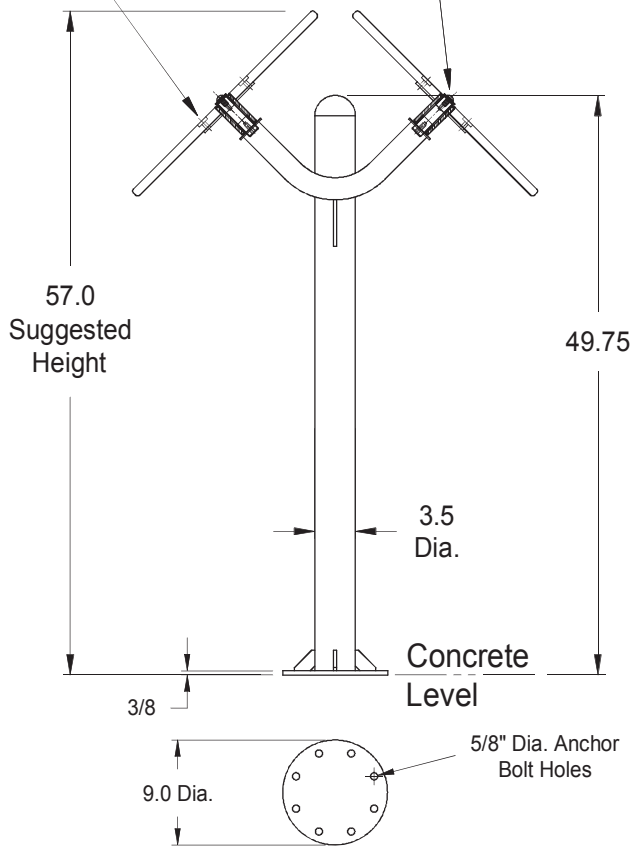

**Suggested Anchoring Hardware for Surface Mount Plate:**  
 7/16" to 1/2" diameter x 4" long, expanding wedge bolts,  
 4 bolts minimum / 8 bolts maximum. Use Base Plate as a template  
 for locating the anchor bolts.

**Notes:**

Anchoring hardware is not included as it is impossible to foresee all possible mounting surface conditions. Therefore, anchoring hardware "Types" only are suggested for a typical concrete pad. The concrete should be fully cured and at least 4" thick. Dimensions shown are in inches.

**Materials:**

- 7 Ga. Steel Plate
- 1/4" Steel Plate Gussets
- 3/8" Steel Base Plate
- 1.90" O.D. x .095" Wall Steel Tube
- 3.50" O.D. x .097" Wall Steel Tube
- 1" O.D. Cold Rolled Steel Pivot Pins
- Self-Lubricating Solid Metal Bearings
- Aluminum End Caps
- 3/4" Thick x 22" Dia. Polyethylene Wheels

**Finish:** Polyester Powder Top Coat over In-Line Galvanized Tube or E-Coated Substrate.

**Hardware:** Tamper Resistant Stainless Steel