




Barrier free, single level Drinking Fountain and Water Bottle Filler Station
 Mounting: Wall Mount

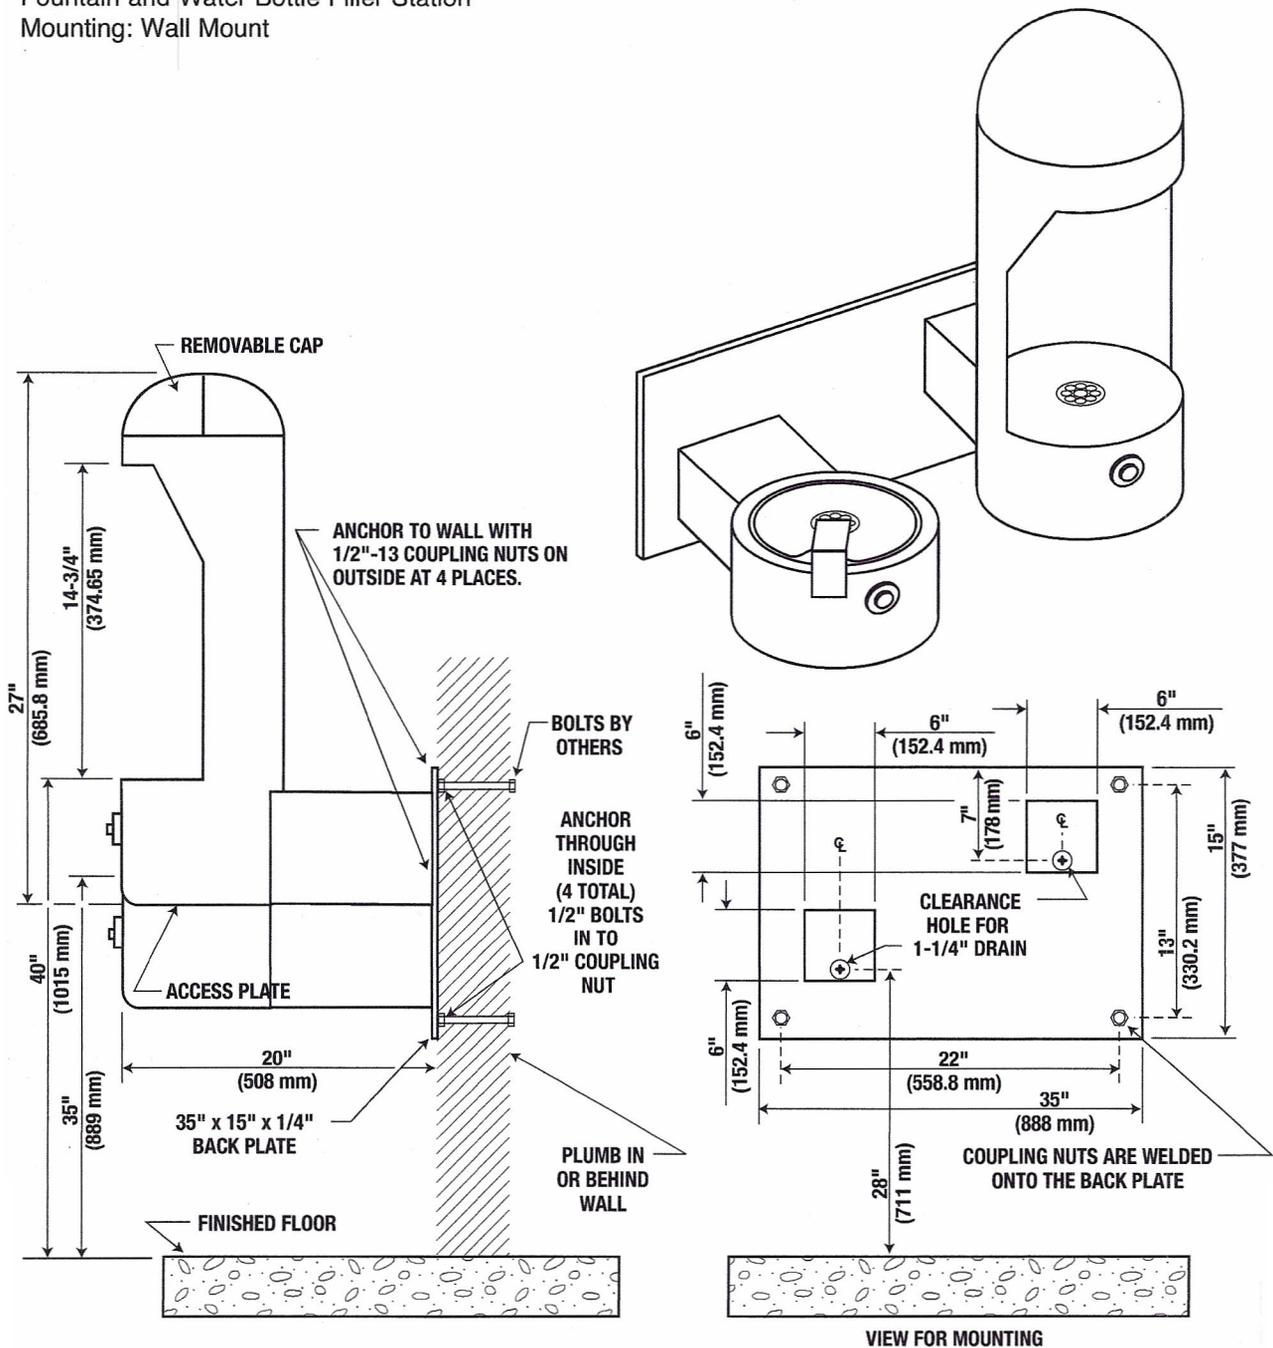

**NOTE: OPTIONAL FLOOR SUPPORT CARRIER
 FLWMP-2 IS AVAILABLE AND ADVISABLE
 FOR IN WALL INSTALLATION.**

NOTE: THESE ROUGH-IN DIMENSIONS
 MAY VARY 1/2" (13 mm) PLUS OR MINUS

Note: All dimensions subject to manufacturing variance of plus or minus 1/4" (6 MM).

WATER BOTTLE FILLER STATION SPECIFICATIONS

TYPE: Combination wall mounted filtered water bottle filler and handicap accessible drinking fountain.

ARMS: 3/16" sheet steel arms projecting 20" from the wall; 10-3/4" diameter steel pipe with 3/16" wall thickness.

RECEPTORS: 18 gauge stainless steel with chrome plated brass drain plug on fountain. Powder coated metal with chrome plated brass drain plug on filler.

BUBBLER: Chrome plated brass, locked to receptor with vandal resistant steel guard.

FILLER SPOUT: Brushed aluminum.

VALVE: Two (2) chrome plated brass push button assemblies recessed in 1/2" steel plates with adjustable flow regulating valves.

MOUNTING: Wall type. Anchor with 1/2" bolts and coupling nuts through 35x15" attached wall plate. Exposed wall mounting available.

WASTE: 1-1/4" nylon fittings and flex hose.

SUPPLY: 1/2" reinforced vinyl tubing with 1/2" IPS hook-up and stainless steel fittings. Inline coconut carbon water filter.

FINISH: Polyester powder coat.

COLOR: Green. Optional colors: red, blue, dark bronze, black, silver, sand, yellow, orange and white.

OPTIONS: FLWMP-2 support carrier with mounting plate
WMP-2 mounting plate
-FP frost proof valve system (non-filtered water)
-SS stainless steel