



## Small Sandstone Boulder

SKU: 622pg280

### INSTALLATION INSTRUCTIONS FOR THE BOULDERS LISTED BELOW:

**SND - SM**

**GRN - SM**

**SND - MD**

**GRN - MD**

**SND - LG**

**GRN - LG**

**WARNING:** The surfacing under and around playground equipment is one of the most important factors in reducing the likelihood of life-threatening head injuries. A fall onto a shock absorbing surface is less likely to cause a serious head injury than a fall onto a hard surface.

However, some injuries from falls, including broken limbs, may occur no matter what playground surfacing is used. Safety surfacing per ASTM Standards is not included with the purchase of Playground Boulders and is the responsibility of the owner/operator.

It is the sole responsibility of the owner/operator to determine the appropriate installation type.

**NOTICE:** Labels are enclosed to be applied to the placard on each Playground Boulder by the installer or the owner/operator. Their purpose is to identify the manufacturer, age range of participants and to warn of the consequences of a fall from the equipment to a hard surface below. Install the labels per the enclosed instructions.

# SCHEDULE A

- 1.) Select Boulder Type (Small, Medium or Large)
- 2.) Determine Seismic Design Category from Local Building Codes or Local Building Official
- 3.) Determine Wind Exposure and Wind Speed from Local Building Codes or Local Building Official
- 4.) From schedule, select Installation Type 1, 2, 3 or 4
- 5.) Any conditions which exceed the published installation types require engineering calculations to be performed for that installation.

## SANDSTONE APPROX. WEIGHTS & DIMS

	Weight	Height*	Length	Width
<b>Small</b>	1,450 lbs.	3'	5.5'	6'
<b>Medium</b>	2,350 lbs.	5'	6.5'	4.5'
<b>Large</b>	3,850 lbs.	8'	7.5'	5'

\*Above finished safety surface

## GRANITE APPROX. WEIGHTS & DIMS

	Weight	Height*	Length	Width
<b>Small</b>	1,350 lbs.	3'	5.5'	4.5'
<b>Medium</b>	3,000 lbs.	6'	8'	5.5'
<b>Large</b>	5,100 lbs.	8'	9.5'	7.25'

\*Above finished safety surface

### Small Boulders

Seismic Design Category\*\*/Acceleration (up to) 1.4

Wind Exposure***	Wind Speed** (mph)	Installation Type*
B	125 or less	1
C	100 or less	1
D	94 or less	1

\* See attached Installation Drawings for details of installation types.

\*\* Per ASCE Standard 7-05 or per Local Codes

\*\*\* See below

### Medium Boulders

Seismic Design Category\*\*/Acceleration (up to) 0.7

Wind Exposure**	Wind Speed** (mph)	Installation Type*
B	110 or less	1
C	90 or less	1
B	155 or less	2
C	148 or less	2
D	134 or less	2

Seismic Design Category\*\*/Acceleration between 0.7 and 1.4

Wind Exposure**	Wind Speed** (mph)	Installation Type*
B	155 or less	3
C	148 or less	3
B	134 or less	3

### Large Boulders

Seismic Design Category\*\*/Acceleration (up to) 0.7

Wind Exposure**	Wind Speed** (mph)	Installation Type*
B	110 or less	1
C	90 or less	1
B	140 or less	3
C	115 or less	3
D	100 or less	3

Seismic Design Category\*\*/Acceleration between 0.7 and 1.4

Wind Exposure**	Wind Speed** (mph)	Installation Type*
B	140 or less	4
C	115 or less	4
B	100 or less	4

Wind Exposure B: Urban and suburban areas, wooded areas or other terrain with numerous closely spaced obstructions having the size of single-family dwellings or larger. Exposure B-type terrain shall be assumed unless the site meets the definition of another type of exposure.

Wind Exposure C: Open terrain with scattered obstructions, including surface undulations or other irregularities, having heights generally less than 30 feet extending more than 1,500 feet from the building in any quadrant. This exposure shall also apply to any building located within Exposure B-type terrain where the building is directly adjacent to open areas of Exposure C-type terrain in any quadrant for a distance of more than 600 feet. This category includes flat open country, grasslands and shorelines in hurricane-prone regions.


Wind Exposure D: Flat, unobstructed areas exposed to wind flowing over open water (excluding shorelines in hurricane-prone regions) for a distance of at least 1 mile. Shorelines in Exposure D-type terrain include inland waterways, the Great Lakes and coastal areas of California, Oregon, Washington and Alaska. This exposure shall apply only to those buildings and other structures exposed to the wind coming from over the water. Exposure D-type terrain extends inland from the shoreline a distance of 1,500 feet.

Installation Instructions: Boulders must be installed over a properly prepared foundation as determined by installation types listed above and attached drawings. Using an extended reach forklift rated at 8,000 lbs., slide the forks through the fork lift pockets provided and lift the boulder off of the truck. It is important to extend the forks a minimum of 12 inches beyond the other side of the boulder. This may require the use of fork extensions. Use special care when handling the boulders. Carry boulders level and low to the ground. Do not allow forks to come in contact with finished boulder surface, as this may cause damage. Do not set the boulder on an edge. Place the boulder in the center of the prepared foundation. For boulders requiring concrete slabs, see Detail A for attachment specifications. When Large and Medium boulders are being placed together to form an arch, a gap of 1.5" - 2.5" is required. See Installation Types 5 and 6. After setting the boulder, be sure to cover the fork lift pockets with the provided fork lift pocket covers. Place required safety surfacing (not included).

## INSTALLATION TYPE 1

NOTE: Ensure ABC PAD is level and fully supports entire edge of boulder.

SEE INSTALLATION SCHEDULE A FOR REQUIREMENTS

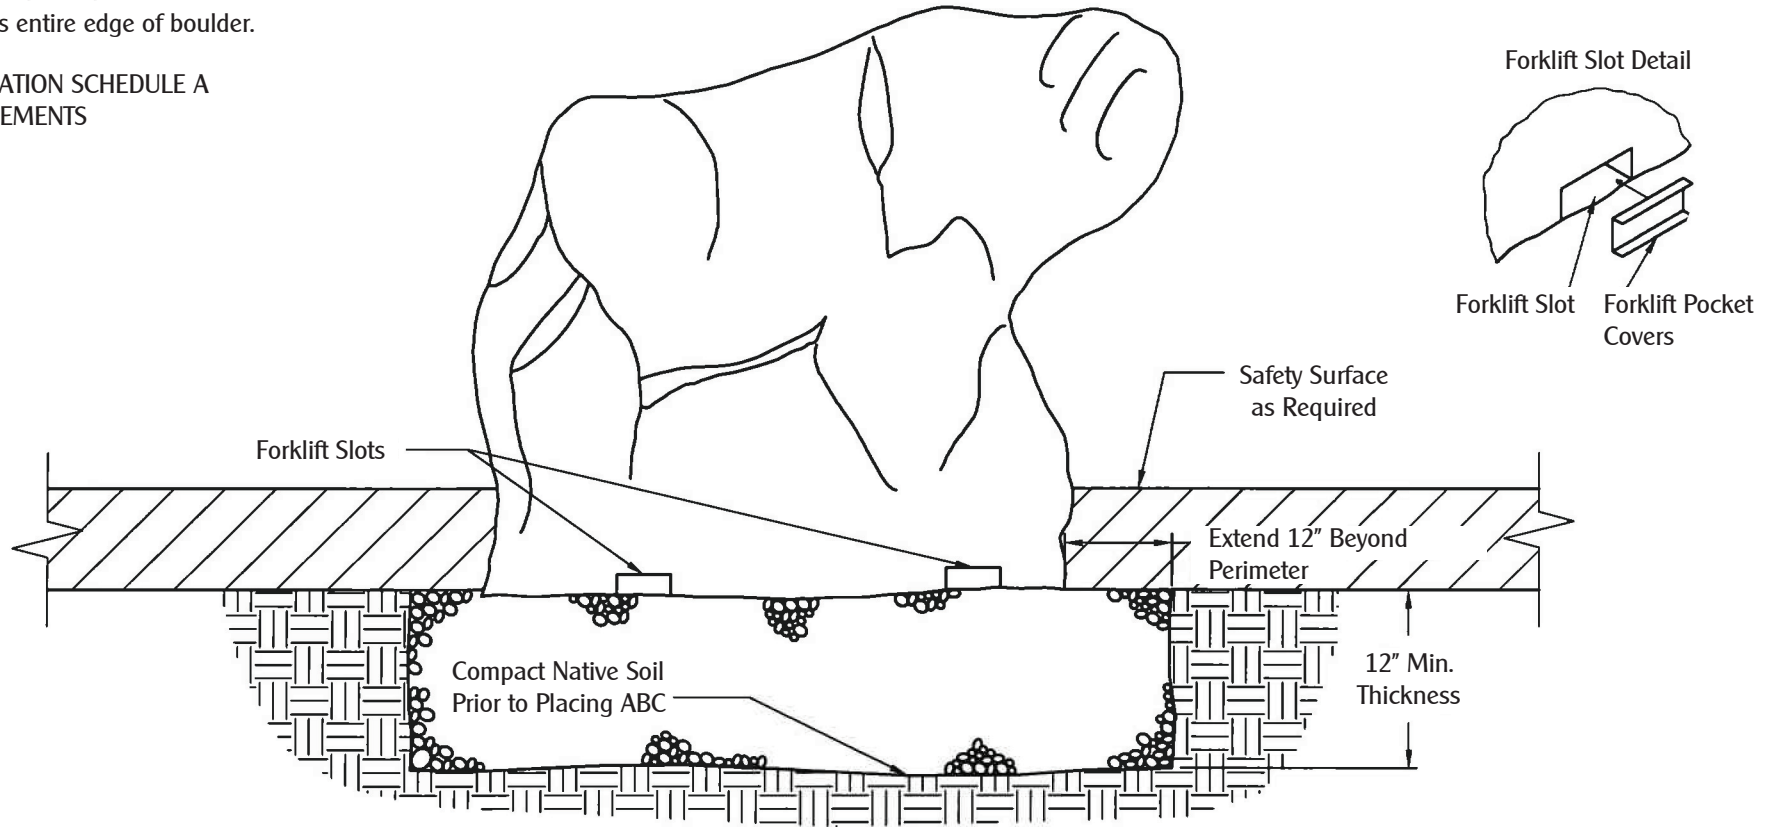

12" Thick Layer of Aggregate Base Course\* (ABC) Compacted to 98% (Standard Proctor)


- \* 100% Pass - 1" Sieve
- 90% Pass - 3/4" Sieve
- 45-75% Pass - 1/4" Sieve
- 2-10% Pass - 200 Sieve

## INSTALLATION TYPE 2

NOTE: Use steel shim (not supplied) as necessary to level and fully support boulder.


Hardware included.

SEE INSTALLATION SCHEDULE A FOR REQUIREMENTS

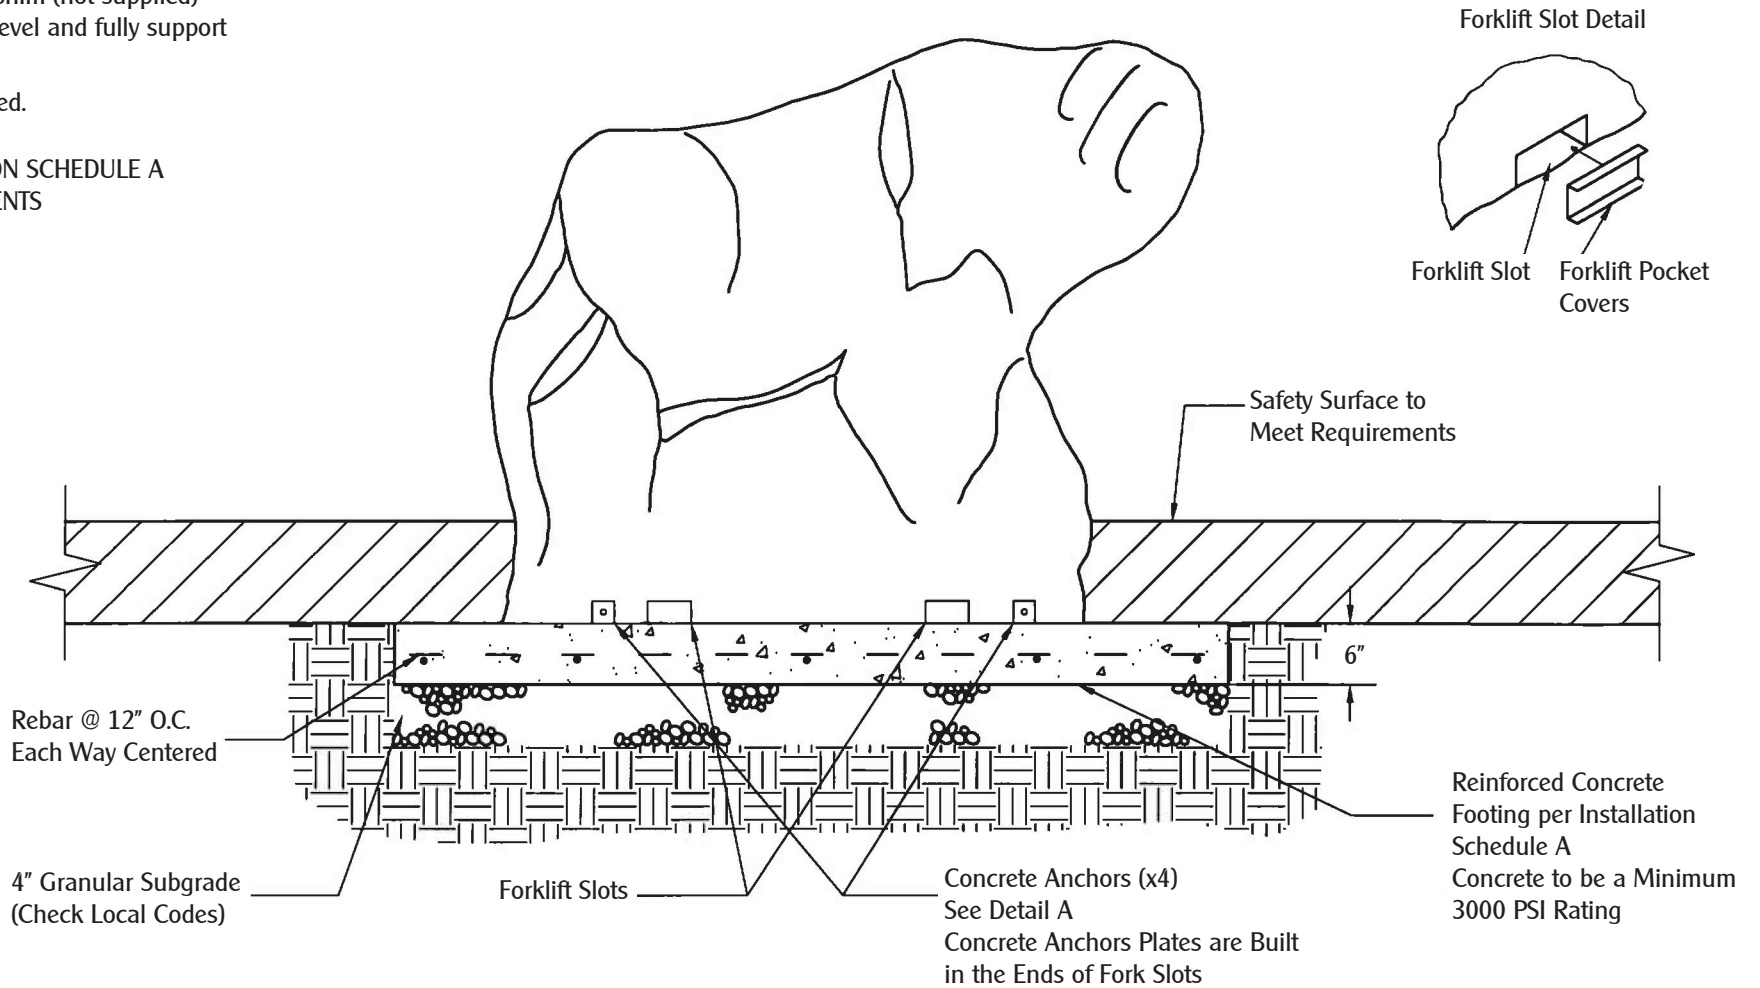

## INSTALLATION TYPE 5 Large and Medium Granite Boulder Installation

See Installation Drawing for Specific Information for each Boulder

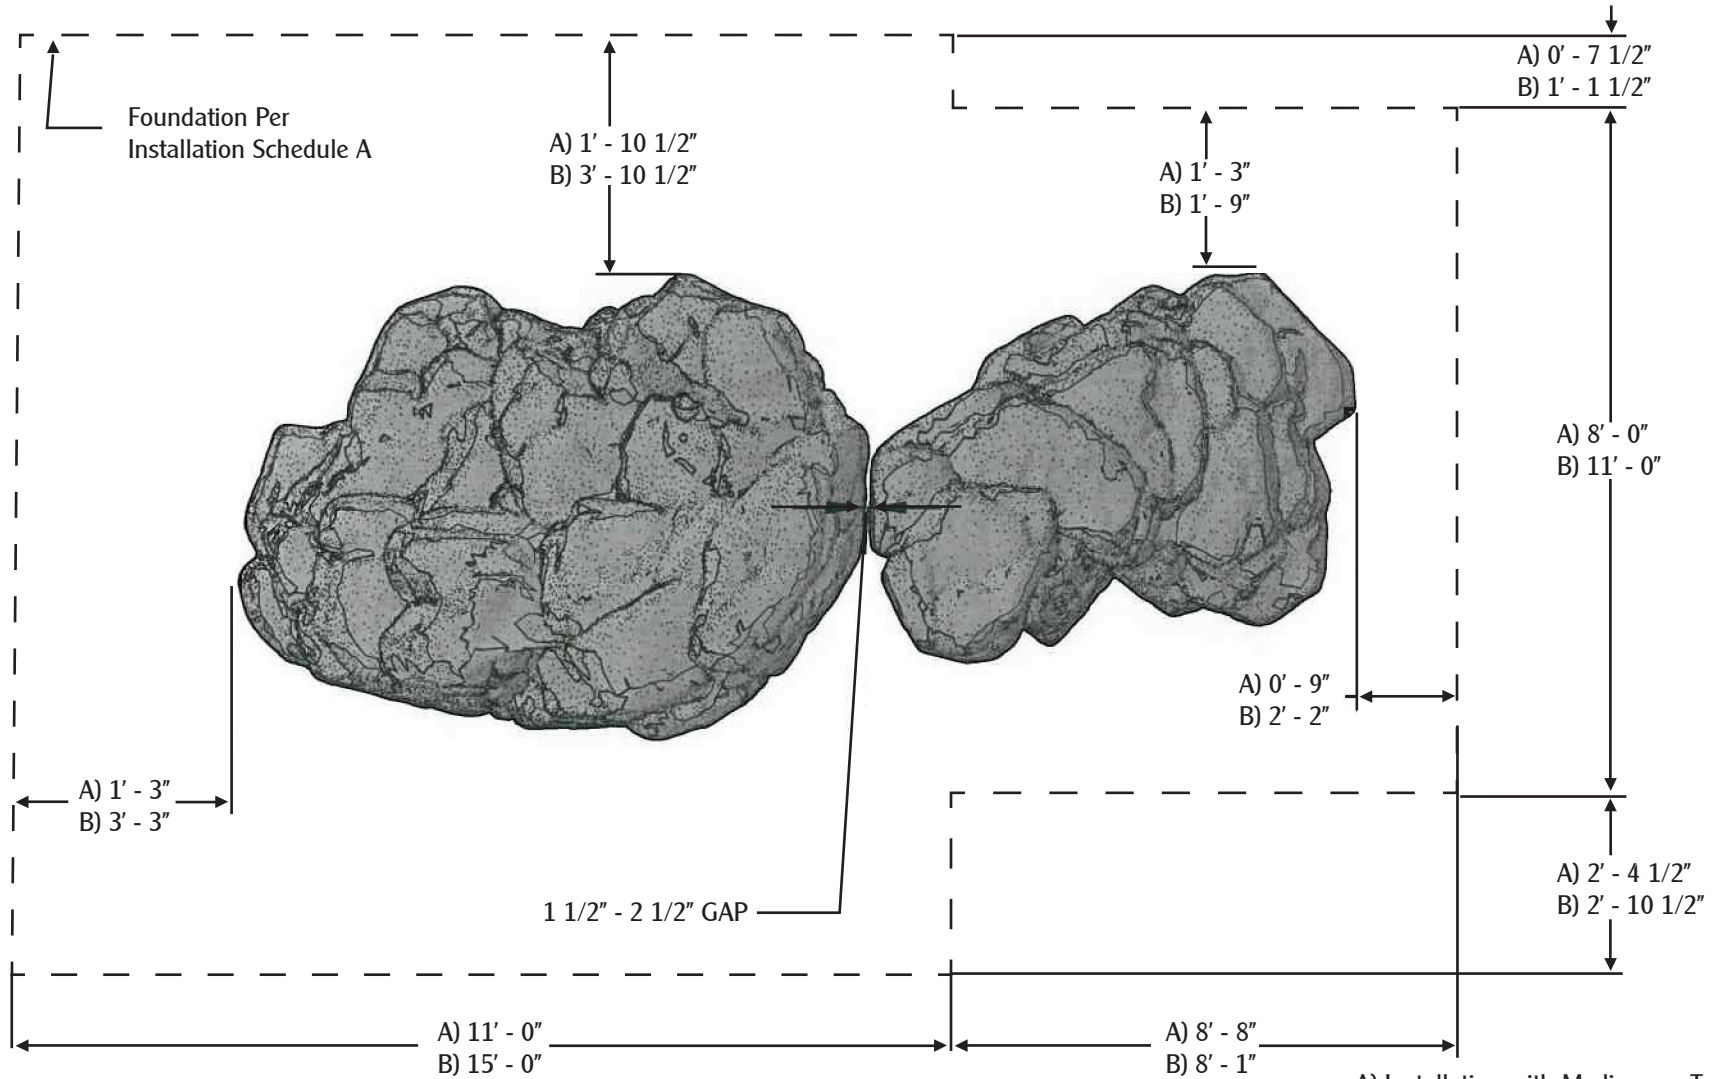


NOTE: Ensure that boulders are placed exactly as shown. No other arrangement or positioning is allowed.

A) Installation with Medium on Type 2 and Large on Type 3  
B) Installation with Medium on Type 3 and Large on Type 4

## INSTALLATION TYPE 6

### Large and Medium Sandstone Boulder Installation

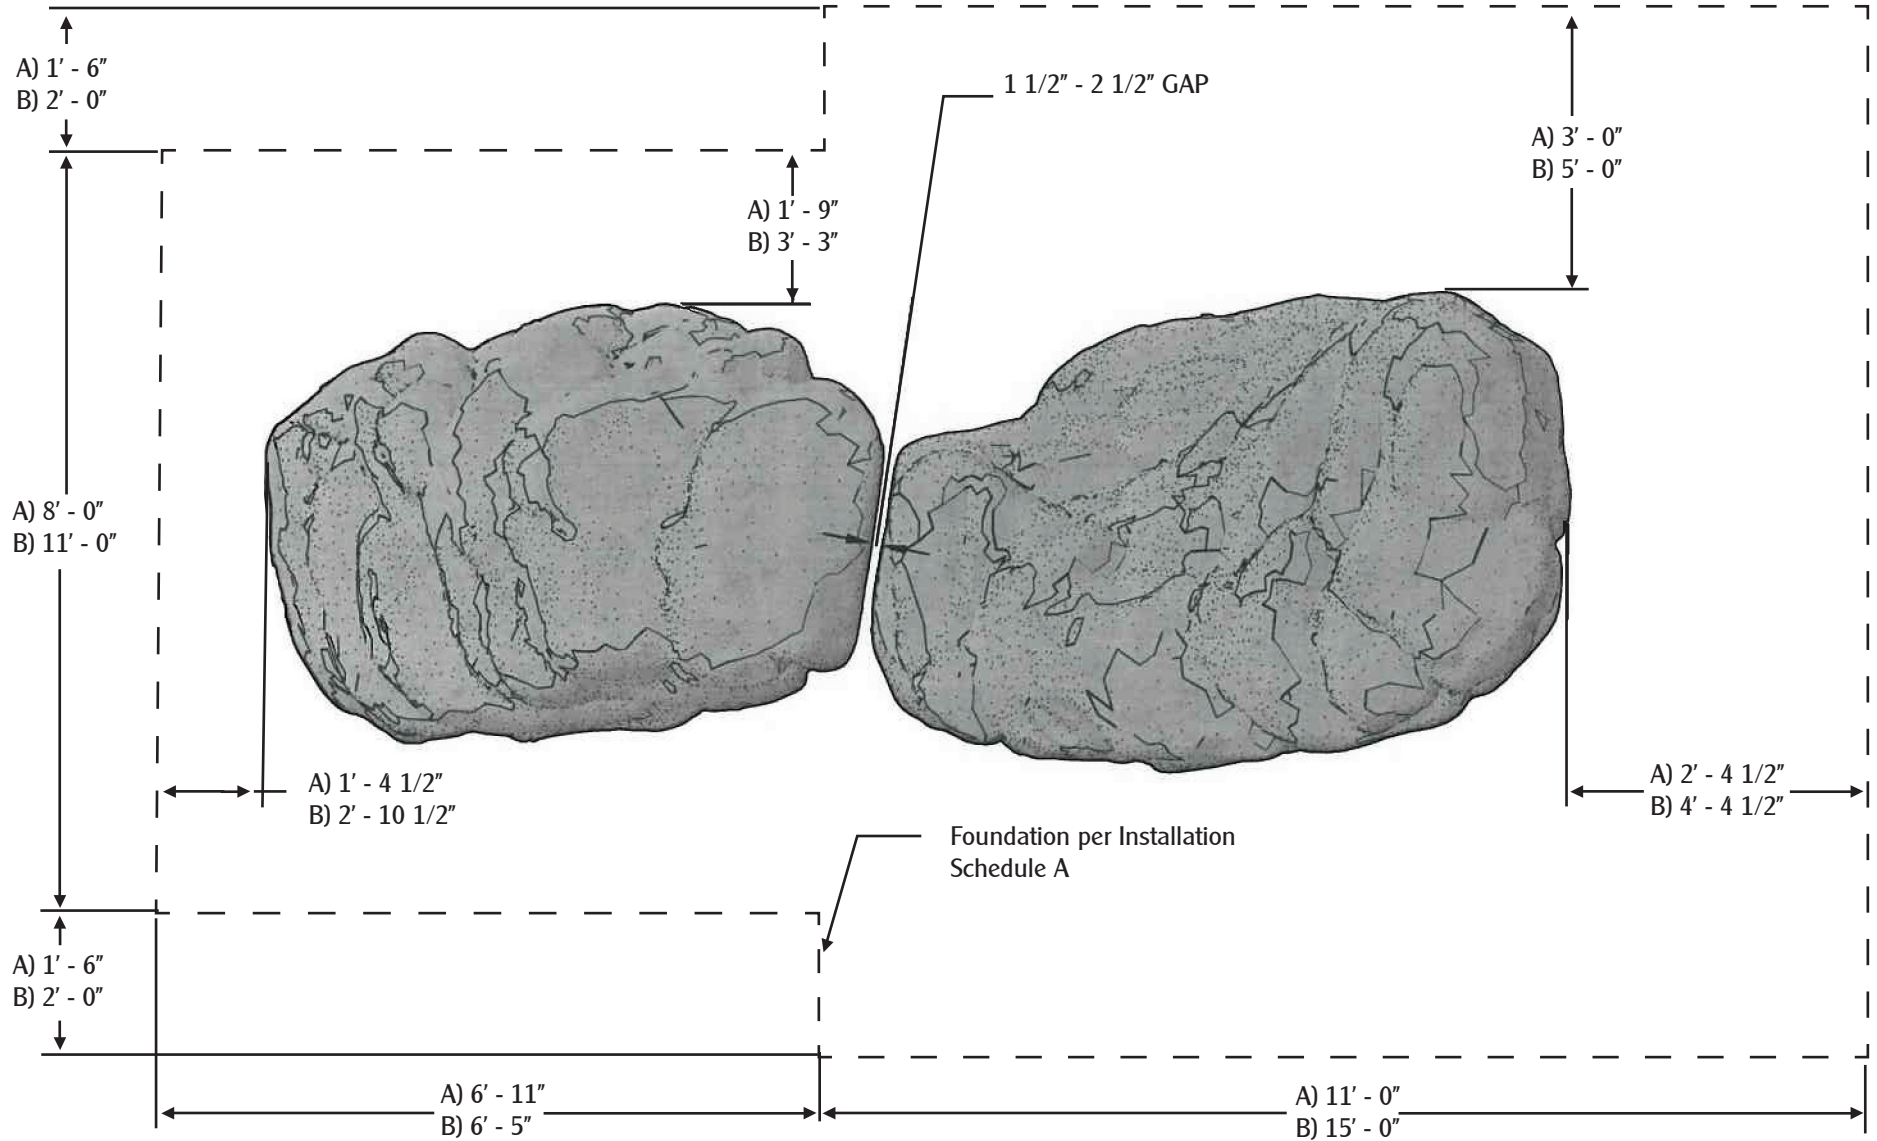

NOTE: Ensure that boulders are placed exactly as shown. No other arrangement or positioning is allowed.

A) Installation with Medium on Type 2 and Large on Type 3  
 B) Installation with Medium on Type 3 and Large on Type 4

**DETAIL A**  
**Anchorage to Concrete Slab**

- NOTE:
- Use only factory prepared holes, do not drill boulder
  - See Installation Schedule A for # of bolts required

